







# **FORTE EXIT**


Vandal Resistant Exit

Project Name:	Model Number:
Prepared By:	Date:

## **FEATURES & BENEFITS**

- AC Only, Self-Powered or Universal DC
- Tamper proof screws for added protection
- Vandal resistant polycarbonate faceplate
- Durable 16 gauge steel housing (14 ga. optional)
- Surface wall, ceiling or end mounting
- CSA 22.2 No. 141-15 Performance Certified

## **DIMENSIONS**

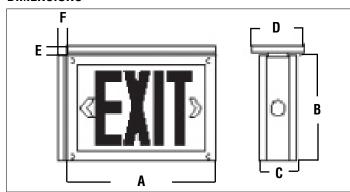

MODEL	Α	В	C	D	Е	F
FR-E	311mm	216mm	76mm	114mm	19mm	19mm
	(12 1/4")	(8 1/2")	(3")	(4 1/2")	(3/4")	(3/4")
FR-E-14G	311mm	216mm	76mm	114mm	19mm	19mm
	(12 1/4")	(8 1/2")	(3 1/4")	(4 1/2")	(3/4")	(3/4")

## **BATTERY TECHNOLOGY**

Designed with a maintenance free, sealed nickel- cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.


## **EXTERNAL SPECIFICATIONS**

The FORTE is constructed from heavy duty steel. Exit face(s) are 16 gauge steel wrap-around collars backed with impact resistant polycarbonate. Tamper resistant screws are standard. The FORTE comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single or double face versions must be specified. Chevrons are field removable and protected under to polycarbonate plate. The self-powered version comes standard with an external LED status indicator and test switch. OPTIONAL FACEPLATE(S) (FFP option) A full 16 gauge steel stencil faceplate is available. The faceplate is backed with the polycarbonate plate.

## **INTERNAL SPECIFICATIONS**

AC ONLY: Standard 120/347VAC input

SELF-POWERED: Standard self-powered versions use sealed nickelcadmium batteries to provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

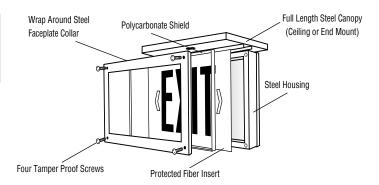

#### **ORDERING GUIDE**

FR-E

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	CHEVRONS	<sup>1</sup> MOUNTING	OPTIONS
FR-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double)	O (No chevrons) U (Universal) L (Left chevron single face) R (Right chevron single face)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount installed)	CC (Custom colour - specify) WG (Wireguard) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 14G (14 gauge steel frame) FFP (Full steel stencil faceplate - field removable chevrons not available with this option) 90SP (90 min. emergency) 120SP (120 min. emergency) SW (Special wording - specify) 2120VDC (Specify 2 or 4 wires) AT (Auto-test, SP only)

NOTES: 1 Mounting must be specified the FORTE is not a universal product; 2 With 120VAC only