



GUIDA EXIT COMBO

Surface/Recessed Edge-Lit Combo Exit (Steel)

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Surface or recessed, ceiling mounting
- Thin profile
- Edge-Lit LED technology
- MR16 lamps
- White, clear or mirrored face
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

BELUCE AUTO-TEST (AT)


The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

BATTERY TECHNOLOGY

Designed with a maintenance free, valve regulated lead-acid battery providing emergency lighting duration as specified per unit. Recharge time of the battery is 24 hours.

LAMP SELECTION	6V	12V	24V
MR16	6, 10W	10, 12, 20, 35, 50W	12, 20, 35, 50W
MR16 LED	5, 7W	2, 5, 7W	5, 7W

DIMENSIONS

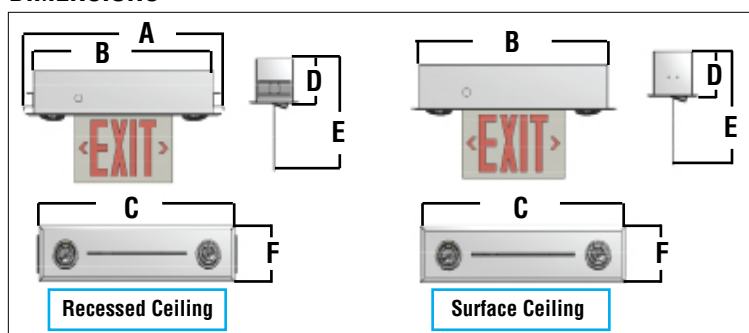

MODEL	A	B	C	D	E	F
Rec. Ceiling	622mm (24 1/2")	559mm (22")	601mm (24")	118mm (4 5/8")	308mm (12 1/8")	152mm (6")
Surface Ceiling		559mm (22")	601mm (24")	118mm (4 5/8")	308mm (12 1/8")	152mm (6")

ORDERING GUIDE

GD-E - - - - -

SERIES	WATTS	LIGHT SOURCE	LETTER COLOUR	FACE#	LAMPS	OPTIONS
GD-E (Exit)	See model rating guide	L (LED)	ROC (Red on clear - single face only) ROW (Red on white) ROM (Red on mirror)	1 (Single) 2 (Double)	See lamp guide	NC (Ni-Cd batteries, see guide) SC (surface ceiling) AT (Auto-test, SP only) CC (Custom colour - specify) BA (Brushed aluminum finish) SW (Special wording - specify) TD (Time Delay - with AT) FAI (Fire alarm interface - specify)

NOTE: ¹Recessed version only; ²Specify open/closed/6-24 VAC

EXTERNAL SPECIFICATIONS

The GUIDA housing backbox is constructed from durable 20 gauge steel. The acrylic face plate is available in both single face or double face versions, with a clear, white or mirrored background (please specify). Recessed versions are supplied standard with a white, baked powder coat die-cast aluminum trim plate. Available in custom colours or alternate metal finishes (please specify). External LED monitor light and test switch are standard.

ELECTRICAL SPECIFICATIONS

Configured with high-output LED light source in 6, 12 or 24VDC backup voltages. Standard versions use a valve regulated lead-acid battery to provide emergency lighting as specified per unit. Standard with 120/347VAC input.

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING	
		30MIN	120MIN
GDE-6-36	6	36	10
GDE-6-50	6	50	15
GDE-6-50-NC	6	50	18
GDE-6-72	6	72	22
GDE-6-90	6	90	27
GDE-6-100-NC	6	100	35
GDE-6-160	6	160	48
GDE-6-180-NC	6	180	60
GDE-12-36	12	36	10
GDE-12-72	12	72	22
GDE-12-90	12	90	27
GDE-12-100-NC	12	100	35
GDE-12-120	12	120	36
GDE-12-150	12	150	45
GDE-12-200-NC	12	200	65
GDE-24-144	24	144	43
GDE-24-180	24	180	54
GDE-24-200-NC	24	200	65