



QUADRA 3 SIDED EXIT


Extruded Aluminum 3 Sided Exit

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall or pendant mounting
- Field removable chevrons
- High-output LED technology
- Extruded aluminum housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

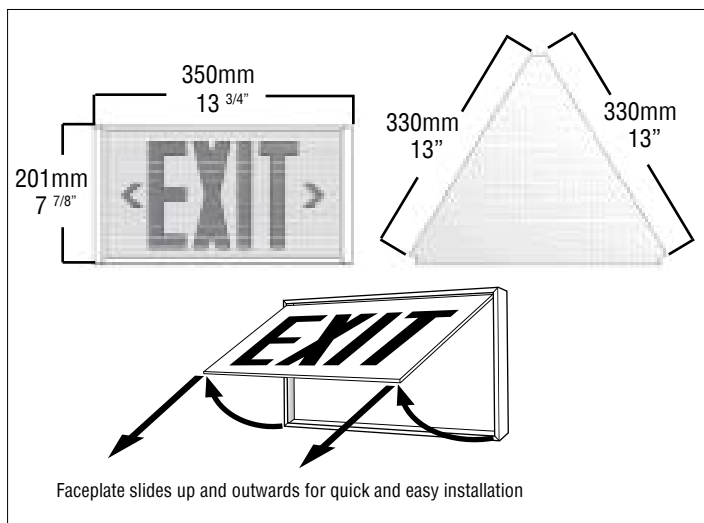

EXTERNAL SPECIFICATIONS

The QUADRA is constructed from durable extruded aluminum. The QUADRA comes standard with a white baked powder coat finish. Available in custom epoxy based powder coat finishes (please specify). Single, double or triple face versions must be specified. Removable chevron arrows are standard on each face. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY and SELF-POWERED: comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Solid state charger & transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The QUADRA is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. Recharge time of the battery is 24 hours.

ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	OPTIONS
QR3-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double) 3 (Triple)	W (wall mount, double face) ¹ P (pendant)	CC (Custom colour - specify) BA (Brushed aluminum finish) SW (Special wording - specify) WG (Wireguard) PK12 (12" pendant kit) UDC (Universal emergency DC circuit 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) TP (Tamperproof screws) ² 120VDC (Specify 2 or 4 wires) ³ FAI (Fire alarm interface - specify)

NOTE: ¹Pendant kit sold separately; ²With 120VAC only; ³Specify open/closed/6-24 VDC